


IL91531

PARALLEL INPUT TONE/PULSE DIALER HIGH-PERFORMANCE SILICON-GATE CMOS

The IN91531N provides a 4-bit data input and a handshaking signal to serve as microcomputer interfaces. Under microcomputer control the IN91531N generates both a DTMF signal and a pulse output for telephone dialing. All necessary dual-tone frequencies and dial pulse outputs are derived from the widely used TV crystal standard, providing high accuracy and stability. The required sinusoidal waveform for individual tones is digitally synthesized on the chip, resulting in a waveform with very low total harmonic distortion.

- 4-bit parallel data input from microcomputer
- TTL compatible inputs and outputs
- Uses TV crystal standard (3.58 MHz) to derive all frequencies, providing high accuracy and stability
- Operating voltage: 2.5 to 5.5 Volts
- Selectable M/B ratio
- 10 PPS dial rate
- DTMF signaling of digits 0, 9, *, #, A, B, C, and D
- Pulse signaling of 0 ~ 9, *, #, and A
- High group tone pre-emphasis: 2 dB
- Low total harmonic distortion in DTMF signaling




N SUFFIX
PLASTIC

ORDERING INFORMATION
IN91531N
T_A = -10° to 70° C

PIN ASSIGNMENT

| | | | |
|-------|-----|----|-----------------|
| MODE | 1 ● | 16 | V _{CC} |
| LATCH | 2 | 15 | TONE |
| M/B | 3 | 14 | ACK |
| T/P | 4 | 13 | CE |
| D0 | 5 | 12 | OSCI |
| D1 | 6 | 11 | OSCO |
| D2 | 7 | 10 | GND |
| D3 | 8 | 9 | DP |

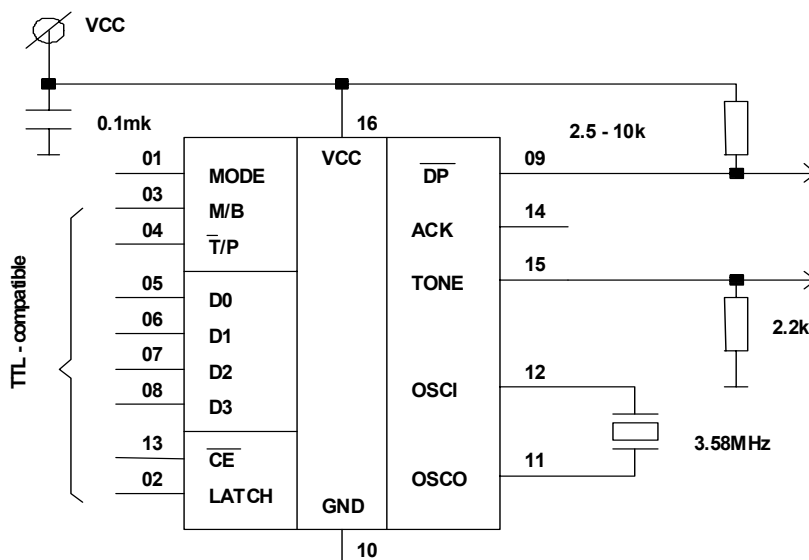

IL91531

DC ELECTRICAL CHARACTERISTICS ($V_{CC}=3.5V, F_{OSC}=3.579545MHz, T_A = +25^{\circ}C$)

| Symbol | Parameter | Test Conditions | Guaranteed Limits | | Unit |
|------------------------|--|--|-------------------|------|----------|
| | | | Min | Max | |
| V_{CC} | Operating Voltage | | 2.5 | 5.5 | V |
| V_{IH} | High-Level Input Voltage | | 0.8 | 1 | V_{CC} |
| V_{IL} | Low-Level Input Voltage | | 0 | 0.2 | V_{CC} |
| I_{OL1} I_{OL2} | Minimum Output Sink Current, \overline{DP} | $V_{CC} = 2.5V, V_{OL} = 0.4V$ $V_{CC} = 5.0V, V_{OL} = 0.4V$ | 1 3 | | mA mA |
| I_{CC} | Maximum Supply Current (Stand-by) | $CE = V_{CC}$ All outputs unloaded | | 8 | μA |
| I_{CCP} | Maximum Supply Current (Pulse) | $CE = GND$ All outputs unloaded | | 1 | mA |
| I_{CCT} | Maximum Supply Current (Tone) | $CE = GND$ All outputs unloaded | | 1 | mA |
| I_{OHACK} | Minimum Output Current, ACK Source | $V_{CC} = 5.0V, V_{OH} = 2.4V$ | 1.6 | | mA |
| I_{OLACK} | Minimum Output Current, ACK Sink | $V_{CC} = 5.0V, V_{OL} = 0.4V$ | 4.0 | | mA |
| V_{OR} | Single Row Tone Output Amplitude | $V_{CC} = 2.5V, R_L = 2.2k\Omega$ | 500 | | mVp-p |
| | | $V_{CC} = 5.5V, R_L = 2.2k\Omega$ | | 1500 | |
| V_{OC} | Single Column Tone Output Amplitude | $V_{CC} = 2.5V, R_L = 2.2k\Omega$ | 500 | | mVp-p |
| | | $V_{CC} = 5.5V, R_L = 2.2k\Omega$ | | 1600 | |

AC ELECTRICAL CHARACTERISTICS

| Parameter | Symbol | Condition | Guaranteed Limits | | | Unit |
|--------------------------------|-------------|----------------|-------------------|------|-----|------|
| | | | Min | Typ | Max | |
| Make/break Ratio | M/B | M/B = V_{CC} | | 1/2 | | |
| | | M/B = GND | | 2/3 | | |
| Make Time | T_M | M/B = 1/2 | | 33.3 | | ms |
| | | M/B = 2/3 | | 40 | | |
| Break Time | T_B | M/B = 1/2 | | 66.6 | | ms |
| | | M/B = 2/3 | | 60 | | |
| Inter-Digit Pause Time | T_{IDP} | M/B = 1/2 | | 791 | | ms |
| | | M/B = 2/3 | | 763 | | |
| Predigit Pause | T_{PDP} | M/B = 1/2 | | 35 | | ms |
| | | M/B = 2/3 | | 21 | | |
| Minimum Tone Duration | T_{MFD} | | | 70 | | ms |
| Minimum Tone Inter-digit Pause | T_{TIDP} | | | 70 | | ms |
| Tone Output Pre-digit Pause | T_{TPDP} | | | 0 | | ms |
| Oscillator Set-up Time | T_{START} | | | 5 | | ms |